



# Alleviate Fatigue

caused by standing  
for long periods

 Fatigue-reducing mat in electrostatic concerned areas

 900mm × 600mm compact and space saving size

 Light gray mat enabling to easily  
detect dirt and dust

 Comfortable cushion design

**RoHS**

**NEW**

*STAT·CLEAN*

**Anti-Fatigue Mat**

**AF-90**

EDP No.621488




The AF-90, anti-fatigue mat, can be used on the current ESD preventive floor.

Conductivity rating :  $R \leq 1.0 \times 10^9 \Omega$

Gray color which facilitates the detection of dirt

Easy to detect dirt and dust that may cause the conductive failure

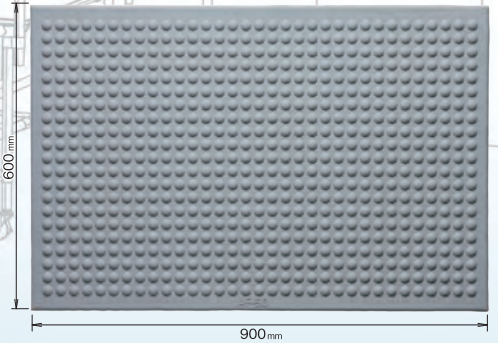


- ▶ For indoor use only
- ▶ Uniform and stable conductive performance
- ▶ Thickness avoids warping
- ▶ 900mm x 600mm compact and space saving size
- ▶ Washable

Comfortable and which make you feel like jumping up



Air pocket on the reverse side spread the load to alleviate fatigue.

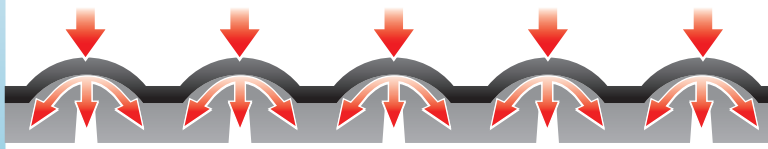

**SPECIFICATIONS**

Model No.	AF-90
Size	W900mm x L600mm x t15mm
Color	Gray
Conductivity	$R \leq 1.0 \times 10^9 \Omega$
Weight	4.2kg
Material	NBR

※ Earth wire is unattached.

● Introduction of products for EPA: **EPA Working Mat · Conductive Rubber Mat**

Controlling electroconductivity to  $10^6\Omega$  or more  $10^7\Omega$  or less without influence from the working environment Ideal for workbenches requiring static electricity measures on backing

- ▶ Offers uniform, consistent conductive performance.
- ▶ Features a matte surface finish, reducing reflections and helping prevent eye fatigue prevention.
- ▶ Heat resistant to dropping solder.




Applications	Conductivity	Material	Directive
Designed for use with work benches	$10^6 \leq R \leq 10^7 \Omega$	NBR+SBR	<b>EPA RoHS</b>

**STRUCTURE**



**COMMON SPECIFICATIONS**

Model No.	LG-100	SG-100
Color	Light green	Green
Size	W1.0m x L1.0m x t2.0mm	W1.0m x L1.0m x t2.0mm
Conductivity	$10^6 \leq R \leq 10^7 \Omega$	$10^6 \leq R \leq 10^7 \Omega$
Weight	35kg/roll	35kg/roll
Material	NBR+SBR	NBR+SBR

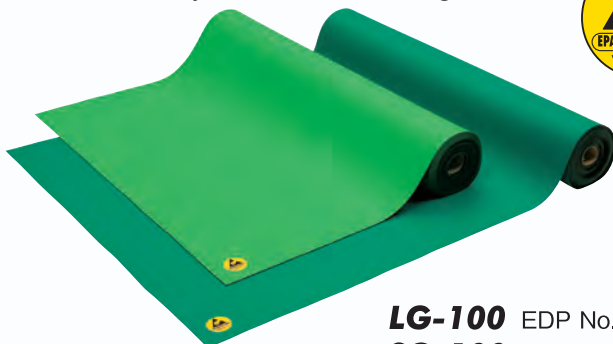

10m ROLL

**LG-100** EDP No.621464  
**SG-100** EDP No.621461

**Warning**  
 ●For safety purposes, read the instruction manual carefully before using the unit. ●Do not use this product in an explosion-proof area. ●A high voltage is applied on this product. Make sure that water, oil, solvents, etc., do not come in contact. ●Avoid dew condensation as it can result in electric shock or product damage.  
 ●Keep away metal objects such as tools or needles, or body parts such as fingers, hands or face from the needle electrode because a high voltage is applied on the needle electrode.

●For improvements, the product specifications, size, price and other information may be subject to change without prior notice.

**VESSEL Co., Inc.**

17-25, Fukae-kita 2-chome, Higashinari-ku, Osaka 537-0001 JAPAN  
 Tel : +81(0)6 6976 7778 Fax : +81(0)6 6972 9441

**VESSEL EUROPE**

6, avenue du 1er Mai, ZAE Les Glaises, 91120 Palaiseau FRANCE  
 Tel : +33(0)1 69 19 17 42 Fax : +33(0)1 69 19 42 20

E-mail : export@vessel.co.jp URL : http://www.vessel.co.jp/english/

Distributed by

Printed in Japan

16090821.005