

**No. Eye-02 Electrostatic Field Meter**

- A hand-held measuring instrument enabling you to measure an invisible electrostatic charge condition or ion balance of the ionizer easily.
- Maximum value (peak value) / pause can be displayed.
- LED cross mark as an index for correct measurement distance.
- Equipped with a female thread for camera screws; using with a tripod or jig enables measurements in stable state. Also provided with a plate for ion balance measurements.
- LCD has backlight and provides a bright, easy-to-see display in low light.
- Provided with a soft housing carrying case.
- Compatible with ISO 9000 traceability. A calibration table and certificate can be issued.



Measurement of charged potential



Ion balance measurement

**CE RoHS**

Model No.	Measurement range		Measuring distance
	Static charge voltage measuring	Ion Balance voltage measuring	
<b>Eye-02</b>	±0~±1.50kV (LO range) ±1.0~±22.0kV (HI range)	0~±220V	25mm±0.5mm between charged (object and the Eye-02)
Power source	Weight		EDP No.
9V DC (006 battery 1 pce.)	170g: without Ion Balance plate 30g: Ion Balance plate		621603

Accessories: Ion Balance Plate×1, Ground Cord w/alligator clip×1, Carrying Case×1


**No. SRC-01 Surface Resistance Checker NEW**

- Surface resistance checker that facilitates the surface resistance measurement of floor, mat, desk and chair.
- Press and hold the measurement button switch, and the measurement value appears on the display. Automatic power off function is available.
- Voltage can be switched to measure a broad range of resistance values.
- Can measure temperature/humidity at the same time as the surface resistance value.
- Supplied with probes to measure "point-to-point resistance", "resistance to ground" and "volume resistance".
- Comes with a carrying case useful to carry all necessary items for measurement.




Accessories:

- Probe (outer diameter: about 066mm, about 2.3 kg): 2
- Curled cord for a body grounding (banana plugs at both ends): 1
- Curled cord for measurement for the point-to-point resistance and resistance to ground (banana plug/mono plug): 2
- Crocodile clip: 1
- Large crocodile clip: 1
- Stainless plate (185mm×100mm): 1
- Carrying case: 1
- 9V battery (006P type: manganese dry battery): 1
- Manuals

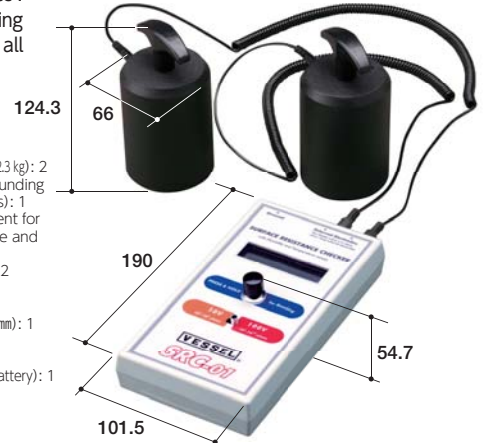


**With a carrying case**

Useful to carry all necessary items for measurement

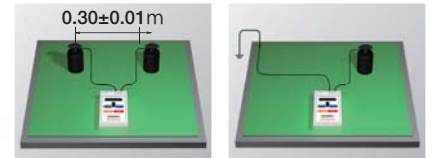

Resistance between 2 points on a surface.

Resistance between a ground and a connecting point by a probe on a surface

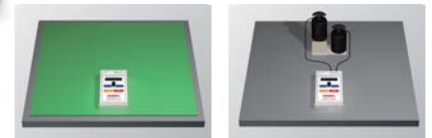

Surface resistivity

Volume resistance

**CE RoHS**

Model No.	Measurement standard	Measurement range	Applied voltage
<b>SRC-01</b>	IEC61340-4-1 JIS-C2170	10 <sup>3</sup> ~10 <sup>12</sup> Ω (Ω/sq)	10V (R<1.0×10 <sup>6</sup> Ω or Ω/sq) 100V (R≥1.0×10 <sup>6</sup> Ω or Ω/sq)
Power source	Weight		EDP No.
9V battery (006P type)	Main body: Approx. 340g (including battery) Total weight: Approx. 6.2kg (including carrying case)		621604

※A battery (accessory) is included as a sample. It may be out of use before the estimated number of use with one battery. Replace with a new one in this case.  
※Calibration certificate can be issued as option (payable).