
AR INPACT WRENCH WILLIAM SERIES

URALGIT WEGIT 1648 kg






Protect Boot

Protecting wrench mechanism from outside impact and avoid sudden sharp contact due to this cushion boot.

No.GT-1600VPX

Capacity (Bolt size) 16mm Square drive 12.7mm (1/2")



Just fit in your palm grip




Well Grip Balance Designed for tool center gravity to

keep best fatigue free operation in long use. VP

360° Turning Silencer

Adjustable exhaust direction to your choice away from water and oil spread



POWERFUL

High Impact Solution




Higher torque efficiency Heavy fastening/releasing Compact design for better footwork

Reversible 4 Step regulator Start lever Single hand held operation center for accurate operation





■ Wide application

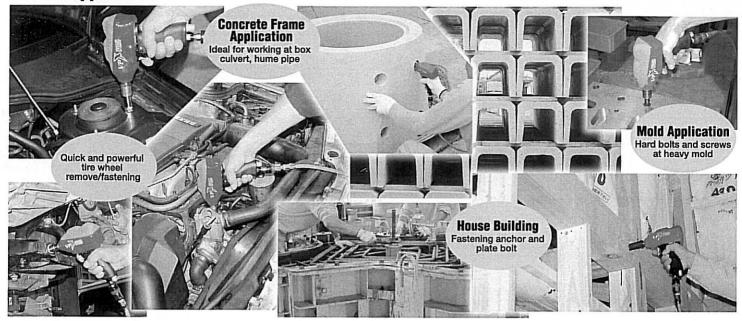

Ideal for other applications such as bolts and nuts at assembly/disassembly of general machineries





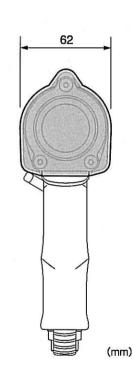

Specifications

EDP No.	Model No.	Capacity Bolt Dia.	Square Drive	Working Air Pressure	Free Load rpm	Air Consumption	Air Hose Inner Dia.	Air Hose Coupling	Overall Length	Weight	Accessories
336013	GT-1600VPX	16mm	12.7mm (1/2")	0.6MPa	8,200r.p.m.	0.4m³/min	6.35mm	PT1/4	169mm	1.48kg	●"L" Wrench (A/F4mm) 1pc. ●Goupling (BPB-2) 1pc.

Warning

- For your safety use, read operation manual thoroughly in utmost care and never start the operation nor replacement of point tools.
- •Use proper working air pressure 0.6MPa at the tool. Avoid the tool use in higher air pressure. This over pressured operation may ruin the mechanism and even dangerous to yourself.

VESSEL CO., INC. .
OSAKA, JAPAN

Distributed by

03021733,002 Printed in Japan